



**WEST MICHIGAN RUBBER & SUPPLY**  
**1.800.533.9677**  
**sales@westmichiganrubber.com**

**UREVAC-2**  
 Medium duty  
 Polyurethane-lined  
 lightweight PVC  
 material handling hose

**Features and Benefits**

- Polyurethane-lined HMW PVC construction — provides excellent sub-zero flexibility.
- Smooth abrasion-resistant polyurethane liner — eliminates material build-up.
- Black external PVC reinforcing helix — provides high abrasion-resistance, increased flexibility and allows hose to slide easily... easier to handle.


**General Applications**

- Grain clean-up wand hose.
- Rooftop cleaning wand hose.
- Insulation blowing.
- Lawn, leaf and mulch collection.
- Corrugated paper products scrap collection.

NOTE: Service life may vary depending on operating conditions and type of material being conveyed. Not for liquid handling use.

**Service Temperature Range**  
 -40° F to 150° F

Actual service temperature range is application-dependent.

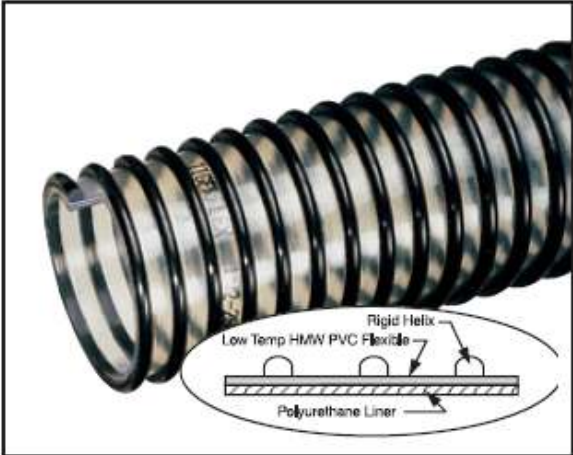

Series	ID (In.)	Nominal		Approx. Liner Thickness (mm)	Working Pressure (PSI)		Vacuum Rating (In. Hg)		Min. Bending Radius @ 68°F	Standard Length (Ft)	Approx. Wt. (lbs/ft.)	
		ID (mm)	OD (In.)		OD (mm)	68°F	104°F	68°F				104°F
UV2-150	1 1/2	38.1	1.87	47.5	0.7	25	10	22	16	1.5"	60	.29
UV2-200	2	50.8	2.47	62.7	0.8	25	10	21	14	2.5"	60	.40
UV2-250	2 1/2	63.5	2.96	75.2	1.0	20	8	19	12	3"	60	.53
UV2-300	3	76.2	3.54	89.8	1.1	20	8	18	11	4"	60	.67
UV2-400	4	101.6	4.57	116.1	1.1	15	7	13	9	6"	60	1.02
UV2-500	5	127.0	5.58	141.7	1.1	15	7	10	7	8"	60	1.22
UV2-600	6	152.4	6.62	168.1	1.1	10	5	7	5	10"	60	1.68
UV2-800	8	203.2	8.67	220.2	1.1	10	5	5	3	14"	20	2.24